
57LASH WASH RACK










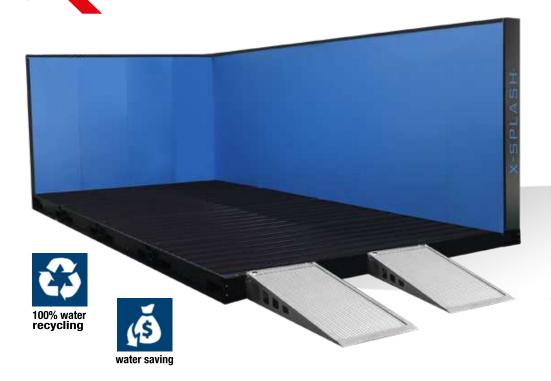





Mod. X-10

264 gallon capacity



3 Killdeer Court, Suite 301 www.TrimeUSA.com

WASH RACK

A self-contained, environmentally friendly, cleaning system for construction plant and equipment. It comes as standard with heavy duty automatic X-30 filtration systems.

How it works:

The wash bay is made with a diamond tread ramp and a 87" high wall. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay. Inside the rear tank, a float switch activates a diaphragm pump which delivers the dirty water into the filtration tanks to start the filtration process. After the water has been through this process, a booster pump delivers the water again to your pressure washer. Through the filtrating system, you can use the same water repeatedly. The filters inside the separator tank can be easily replaced, guaranteeing an adequate filtering barrier.



Advantages

- The system allows you to recycle water and therefore the contaminated water does not get into the drainage system.
- Less water consumption means money is saved and savings are also gained in handling and washing time.
- Easily transportable, easy to assemble and disassemble
- Innovative design and modular construction system make our wash bays suitable for several indoor and outdoor uses.
- Environmentally friendly

SUITABLE FOR THESE SECTORS







contractors



industrial applications



mechanical workshops



Technical Specifications - X-Splash - X-4	
Useful dimension mm.	118" x 236"
Total dimension mm.	141" x 285"
Filtration tank dimension mm.	(X-30) 111" x 30" x 40"
Maximum load capacity kg	11,023 lbs
Walls standard height mm.	87"
Total dry weight of the bay kg	4,939 lbs
Diaphragm pump	54 kW, 5 gallons/min
Booster pump	37 kW, 1.3 to 11 gallons/min
Filtering system	X-10
Option filtering system	X-15, X-30, X-60
Option maximum load capacity kg	22,046 lbs