

X-SPLASH X-2

T-ZERO_{PRO}



100%
water
recycling

filtering system



Mod. X-TECH-10
264 gallon capacity



creating a
more sustainable
and environmentally
friendly future

X-SPLASH X-2

T-ZERO^{PRO}



ZERO
emissions

water
saving

APPLICATIONS



Constructions



Industrial




Small wash size

FEATURES

- ✓ Closed circuit system
- ✓ Easy to move and transport
- ✓ Quick and simple assembly
- ✓ No water waste
- ✓ No building permits required
- ✓ Environmentally friendly

WASH BAY

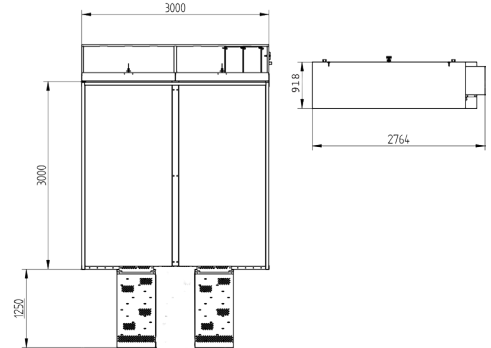

A self-contained, environmentally friendly, cleaning system for construction plant and equipment. The wash bay is equipped with galvanized ramps and 87" high walls. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay. Inside the rear tank, a float switch activates a diaphragm pump which delivers the dirty water into the filtration tanks to start the filtration process. After the water has been through this process, a booster pump delivers the water again to your pressure washer. Through the filtering system, you can use the same water repeatedly. The filters inside the separator tank can be easily replaced, guaranteeing an adequate filtering barrier.

Technical data

Useful dimension	118" x 118"
Total dimension	118" x 191"
Filtration tank dimension	(X-TECH-30) 111" x 30" x 40"
Maximum load capacity	11,023 lbs
Walls standard height	87"
Total dry weight of the bay	2,844 lbs
Diaphragm pump	54 kW, 5 gallons/min
Booster pump	37 kW, 1.3 to 11 gallons/min
Filtering system	X-TECH-10
Option filtering system	X-TECH-15 - 30 - 60
Option maximum load capacity	22,046 lbs



Trime US, Inc. - 3 Killdeer Court, Suite 301 - Swedesboro, NJ 08085 - www.trimeusa.com
(877) 97TRIME - (877) 978-7463 - sales@trimeusa.com

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.